

# OHM'S LAW

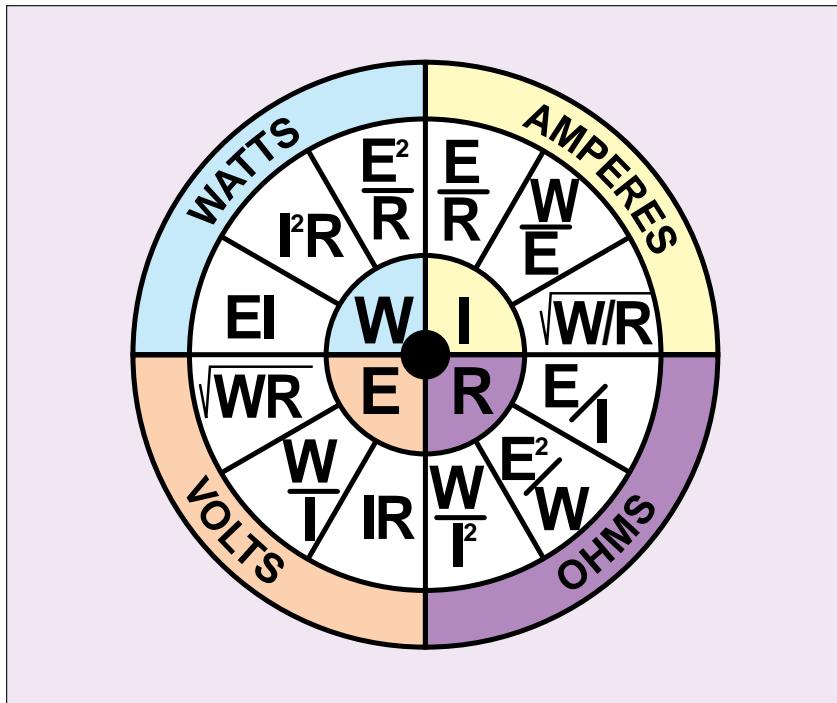


Table 11 Currents for resistance heating loads

kW	Single phase					Three phase balanced load			
	120V	208V	240V	440V	480V	208V	240V	440V	480V
1	8.4	4.8	4.2	2.3	2.1	2.8	2.5	1.4	1.3
2	16.7	9.7	8.4	4.6	4.2	5.6	4.9	2.7	2.5
3	25	14.5	12.5	6.9	6.3	8.4	7.3	4	3.7
4	33.4	19.3	16.7	9.1	8.4	11.2	9.7	5.3	4.9
5	41.7	24.1	20.9	11.4	10.5	13.9	12.1	6.6	6.1
6	50	28.9	25	13.7	12.5	16.7	14.5	7.9	7.3
7.5	62.5	36.1	31.3	17.1	15.7	20.9	18.1	9.9	9.1
10	83.4	48.1	41.7	22.8	20.9	27.8	24.1	13.2	12.1
12	100	57.7	50	27.3	25	33.4	29	15.8	14.5
15	125	72.2	62.5	34.1	31.2	41.7	36.2	19.7	18.1
20	167	96.2	83.4	45.5	41.7	55.6	48.2	26.3	24.1
25	209	121	105	56.9	52.1	69.5	60.3	32.9	30.1
30	250	145	125	68.2	62.5	83.4	72.3	39.4	36.2
50	417	241	209	114	105	139	121	65.7	60.3
75	625	361	313	171	157	209	181	98.6	90.4
100	834	481	417	228	209	278	241	132	121

Percent of rated wattage for various applied voltages

Applied Voltage	110	115	120	208	220	230	240	277	380	415	440	460	480	550	
110	100%	91%	84%	28%	25%	23%	21%	16%	8.4%	7%	6.2%	5.7%	5.2%	4%	
115	109%	100%	92%	31%	27%	25%	23%	17%	9.0%	7.6%	6.7%	6.2%	5.7%	4.3%	
120	119%	109%	100%	33%	30%	27%	25%	19%	10%	8.4%	7.4%	6.8%	6.3%	4.8%	
208				300%	100%	89%	82%	75%	56%	30%	25%	22%	20%	14%	
220					112%	100%	91%	84%	63%	34%	28%	25%	23%	16%	
230						122%	109%	100%	92%	69%	37%	31%	27%	23%	17%
240							133%	119%	109%	100%	75%	40%	33%	30%	19%
277								133%	100%	53%	45%	40%	36%	33%	25%
380									188%	100%	84%	74%	68%	63%	47%
415										119%	100%	89%	81%	75%	57%
440											112%	100%	91%	84%	64%
460												123%	109%	100%	92%
480													119%	109%	100%
550														156%	143%

## VARIATIONS OF OHM'S LAW

### VOLTS

$$\text{VOLTS} = \frac{\text{WATTS} \times \text{OHMS}}{\text{AMPERES}}$$

$$\text{VOLTS} = \frac{\text{WATTS}}{\text{AMPERES}}$$

$$\text{VOLTS} = \text{AMPERES} \times \text{OHMS}$$

### OHMS

$$\text{OHMS} = \frac{\text{VOLTS}}{\text{AMPERES}}$$

$$\text{OHMS} = \frac{\text{VOLTS}^2}{\text{WATTS}}$$

$$\text{OHMS} = \frac{\text{WATTS}^2}{\text{AMPERES}^2}$$

### AMPERES

$$\text{AMPERES} = \frac{\text{VOLTS}}{\text{OHMS}}$$

$$\text{AMPERES} = \frac{\text{WATTS}}{\text{VOLTS}}$$

$$\text{AMPERES} = \frac{\text{WATTS}}{\text{OHMS}}$$

### WATTS

$$\text{WATTS} = \frac{\text{VOLTS}^2}{\text{OHMS}}$$

$$\text{WATTS} = \text{AMPERES}^2 \times \text{OHMS}$$

$$\text{WATTS} = \text{VOLTS} \times \text{AMPERES}$$

### Currents for resistance heating loads

Heating elements are frequently used at voltages other than those shown in our catalog. The percentages shown below are used to determine the resulting wattage. Should you wish to use a heater on a voltage not shown above, you may calculate the resultant wattage with this formula:

$$\text{Actual Wattage} = \text{Rated Wattage} \times \frac{\text{Applied Voltage}^2}{\text{Rated Voltage}^2}$$